

# FlexiROC T40 R

Tophammer surface drill rigs for quarrying and construction

FlexiROC T40 R hole diameter: 64–127 mm (2.5"–5")





# Tackle the toughest terrain safely

FlexiROC T40 R is a versatile tophammer drill rig. It features full Radio Remote Control of drilling, tramming and winching functions.

The FlexiROC T40 R is developed and designed to deliver high performance in demanding construction applications. It is a very efficient alternative for small and medium size quarrying jobs. Even in difficult terrain, utilization of the rig remains high, thanks to its long boom-reach, a low centre of gravity and a hydraulic support leg that can be used during tramming.

## + Main benefits

**Unique, durable cylinder-operated feed system** optimizes rock drilling and increases rock tool life

**Long boom reach** is ideal for demanding construction jobs

**Supreme productivity** thanks to proven COP rock drill series



Discover more about  
the FlexiROC T40 R





# Designed and built for flexibility

From pipelines, trenching, foundations, slope stabilisation, quarrying, road construction and civil engineering projects — the FlexiROC T40 R provides all the power and flexibility needed to handle a wide range of applications.



## + Designed to conquer difficult sites

The FlexiROC T40 R is perfect for places where space is restricted and access is difficult — such as on slopes near road and railway traffic. This radio remote controlled drill rig can be relied upon to get the job done safely and efficiently, especially in rough terrain or on unstable slopes which are prone to landslides.



## + Highly productive with minimal environmental impact

This rig is equipped with a CAT engine that meets all the new exhaust emission requirements for Tier 4 Final areas. It delivers the exact power you need in each phase of your operation whilst ensuring that not a drop of fuel goes to waste. A powerful generator and heavy-duty batteries help to make sure the rig always starts in testing conditions. An extra large fuel tank delivers up to 12 hours of continuous operation so downtime is kept to a minimum.



## + Optimized performance

The performance of the FlexiROC T40 R can be further optimized by selecting the right rock drill for your requirements. The COP SC25-HF is extremely productive in the hole range of 64–76 mm (89mm in soft/medium rock). The COP SC25-HE is optimized for a hole range of 76–127 mm.



# A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

# Technical specifications

## Main Components

- Track frames with single grouser pads and cleaning holes, hydraulic track oscillation and two speed traction
  - Caterpillar turbo charged diesel engine or C 7.1 (Tier 4 Final and Add Blue)
- Atlas Copco screw type compressor
  - Radio Remote Control system
  - Folding boom system
  - Aluminum profile feed beam
  - Hydraulic rock drill
- Dust collection system
  - Hydraulic cylinder feed with hose guide and double drill rods support with movable lower guide/dust hood
  - Carousel type rod handling system

## Hole range (recommended)

	Thread	Metric	US
FlexiROC T40 R	T45, T51	Ø 64–127 mm	Ø 2.5"–5"
Hydraulic rod handling system for max hole length, with 3,6 m (12') ext. rods			
FlexiROC T40 R	T45, T51	28 m	92'

## Hydraulic rock drill

Rock drill	Drill rig	Hole diameter		Impact power	Hydraulic pressure, max		Impact rate, max	Torque, max		Weight approx	
COP SC25-HF	FlexiROC T40 R	Ø 64–89 mm	Ø 2.5"–3.5"	25 kW/33.5 hp	240 bar	3 481 psi	55/71 Hz	1 550 Nm	1 143 lbf/ft	189 kg	417 lb
COP SC25X-HF										250 kg	551 lb
COP SC25-HE	FlexiROC T40 R	Ø 76–127 mm	Ø 3"–5"	25 kW/33.5 hp	200 bar	2 900 psi	44/55 Hz	1 970 Nm	1 453 lbf/ft	195 kg	430 lb
COP SC25X-HE										255 kg	562 lb

## Feed

FlexiROC T40 R	Metric	US
Feed extension	1 400 mm	55"
Feed rate, max	0.92 m/s	184 ft/min
Feed force, max	20 kN	4 400 lbf
Tractive pull, max	20 kN	4 400 lbf
Total length	7 140 mm	281"
Travel length	4 240 mm	167"

## Engine

Caterpillar turbo charged diesel engine		
CAT C71 Tier 4 Final/Stage 5 (EU/US cert.)		168 kW/225 hp (at 2 200 rpm)

## Compressor

Atlas Copco OIS K-36-C111GD, screw compressor	Metric	US
Working pressure, max	10.5 bar	152 psi
FAD, at normal working pressure	149 l/s	316 cfm

## Hydraulic system

Return and drainage filters (filtration rate)	16 µm absolute
Hydraulic oil cooler max ambient temperature	50°C (122°F)

## Volumes

	Metric	US
Hydraulic oil tank	250 l	65 gal
Hydraulic system, total	300 l	79 gal
Compressor oil	24 l	6.3 gal
Diesel engine oil	28 l	7.4 gal
Diesel engine, cooling water	35 l	9.2 gal
Diesel engine, fuel tank	370 l	98 gal
Traction gear	3 l	0.8 gal
Lubrication tank (ECL)	10 l	2.6 gal


## Dust collector DCT 110

	Metric	US
Filter area	11 m²	118 sq.ft
Suction capacity at 500 mm wg	560 l/s	1 200 cfm
Suction hose diameter	127 mm	5"
Cleaning air pressure, max	7.5 bar	109 psi
Cleaning air consumption	2–4 l/pulse	0.06–0.12 cu.ft/pulse
Number of filter elements	11 pcs	

## Electrical system

Voltage	24 V
Batteries	2 x 12 V, 185 Ah
Alternator	28 V, 95 Ah
Work lights, front	4 x 70 W
Work lights, rear	2 x 70 W
Work lights, feed	2 x 70 W


Technical specifications

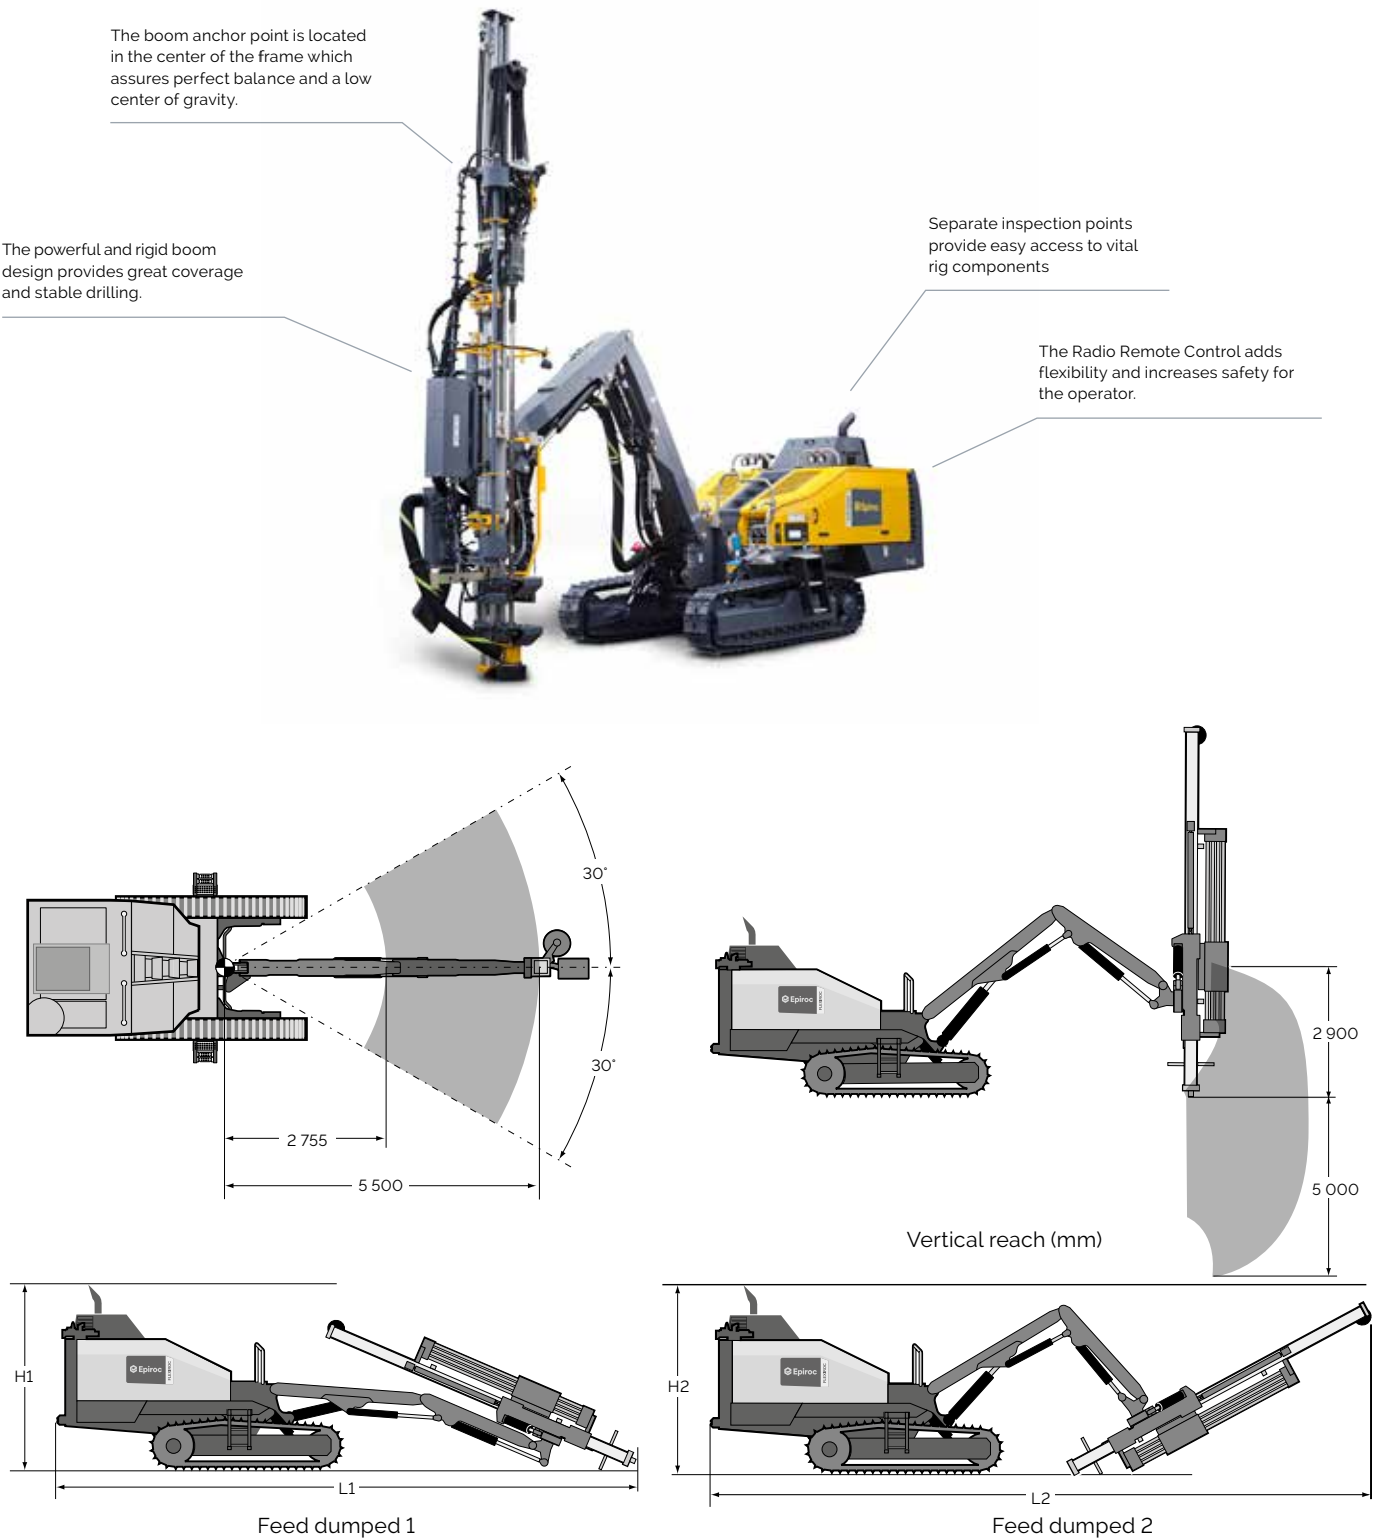

Transport dimensions and weight

FlexiROC T40 R	Metric	US
Weight	15 810 kg	34 855 lbs
<b>Feed dumped 1</b>	<b>Metric</b>	<b>US</b>
Height (H1)	3 200 mm	126'
Length (L1)	11 600 mm	457'
<b>Feed dumped 2</b>		
Height (H2)	N/A	N/A
Length (L2)	N/A	N/A

Technical specifications

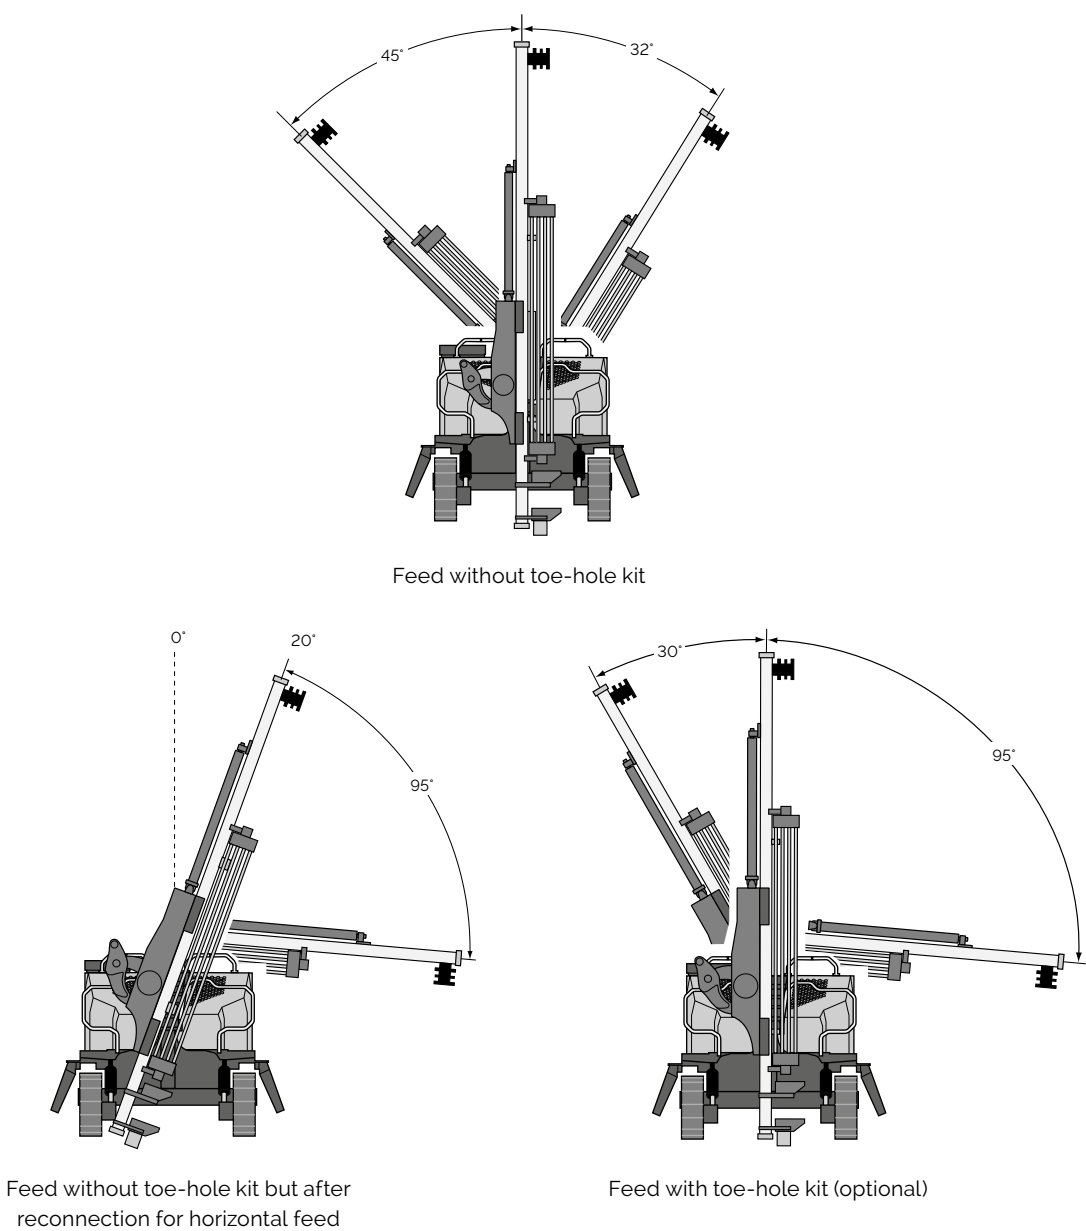

Selection of options

- Carrier:**

  - Hydraulic support leg
  - Hydraulic winch with towing eye and wire guides, Radio Remote Controlled
  - Diesel engine preheater
  - Air flow switch
  - Electric refuelling pump
  - Service hand lights inside canopy, 2 pcs
  - Combined warning sound and warning light
  - ProCom satellite based drill rig monitoring system (only in combination with a written service agreement)
- TDS guide tube guides for drill rods support:**

  - TDS 45 for 45 mm guide tube
  - TDS 56 for 56 mm guide tube
  - TDS 76 for 76 mm guide tube

**Hole measuring systems:**

  - Laser receiver upgrading kit
  - Electronic inclination and hole depth instrument
  - GPS compass for parallel holes
  - Lube oil, lube system and water mist system
  - Central lubrication system, type Lincoln
  - Thread greasing devise ECG (with oil)
  - Thread greasing device, rush type (with grease)
  - Artic hydraulic oil, VG 32
  - Tropical hydraulic oil, VG 68
  - Biological hydraulic oil, VG 46
- Water mist system, 120 l water tank
  - Water mist system, excluding tank

**Dust control:**

  - Rubber disc for DCT

**Delivered equipment, not mounted:**

  - Gas charging equipment for rock drill
  - First 50 hours service kit for compressor
  - Conversion kit T45
  - Conversion kit T51
  - Spare code key for radio transmitter



9868 0315 01, 2021-01 Örebro, Sweden. Legal Notice © Copyright 2021 Epiroc Rock Drills AB, Örebro, Sweden. All product names in this publication are trademarks of Epiroc. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice. Consult your Epiroc Customer Center for specific information.

## United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.  
**[epiroc.com](https://epiroc.com)**

